

# UNI STAR<sup>®</sup> VP Series

**Tower / Rack Universal Mount**


## External Maintenance Bypass

**External Make Before Break Maintenance Bypass for 208V, 240V Input/Output Units and 208/120V, 240/120V Output Units**

External maintenance bypass to provide continuous power without shutting down the connected loads during UPS scheduled maintenance or battery replacement.



SCV-MBS-10K-R

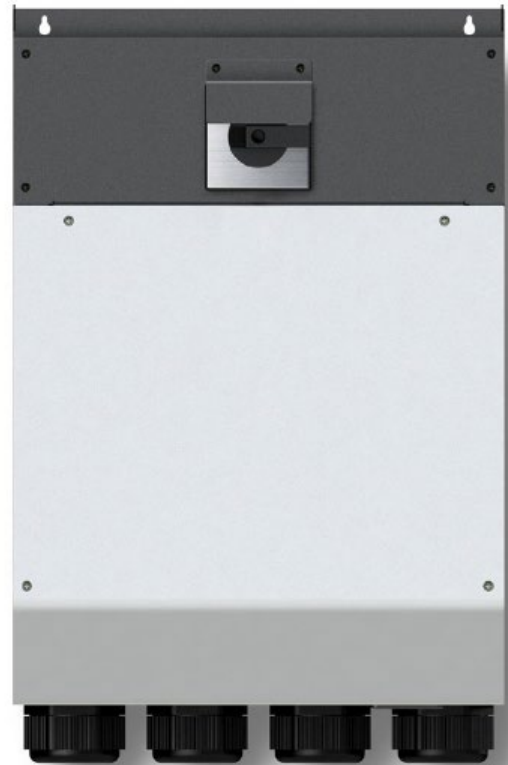

SCV-MBS-10K-W

### MAINTENANCE BYPASS SPECIFICATION

MODEL	SCV-MBS-10K-R	SCV-MBS-10K-W
Current Rating		63 A / pole
Working Voltage		Up to 600 VAC
Frequency		50 Hz or 60 Hz
Insulation Voltage		690 VAC
Protection		Overload
<b>CONNECTION</b>		
Input		Terminal Type (L-N)
Output		Terminal Type (L-N)
Recommended Wires	10 AWG for 6 kVA UPS	8 AWG for 10 kVA UPS
<b>PHYSICAL</b>		
Height x Width x Depth – inches (mm)	3.4" x 17.25" x 6.22" (86.4 x 438.2 x 158.0)	17.40" x 11.80" x 4.90" (442.0 x 299.7 x 124.5)
Net Weight – lbs. / kg	7 / 3	14.3 / 6.5
Form Factor	2 U	-
<b>ENVIRONMENT</b>		
Operating Temperature	0-95 % RH @ 0-40 °C (non-condensing)	